

GB 3P Connections

GB 3P (Original Design) - Designed for deep-stabbing, no cross-threading, and quick makeup in 5 to 6 turns.

Applications

- **Running** Standard large OD Downhole Casing Applications.
- **Rotating** To Aid String Advancement.
- **Driving**


Description

Specialty semi-premium connection machined from heavy-wall coupling stock and forged blanks. The **GB 3P** Connection exceeds pipe body performance properties under all load combinations and is gas tight. Connection designed with 3-Pitch threadform for easy-stabbing, fast makeup without cross-threading. Pin noses engage shoulders in the coupling center for positive indication of proper field makeup. Pin noses, designed for **maximum bearing face area**, provide high torque resistance.

Features

- Uses GB 3P threads.
- Easy-stabbing, fast makeup without cross-threading.
- Meets API Coupling OD and Drift Diameter Specifications.
- Field proven in a variety of static applications.
- Can be rotated to aid string advancement to achieve target.
- Excellent make/break repeatability under field conditions.
- Can be inspected with standard API Thread Gauges by any properly trained/experienced Third Party (special setting standards required).
- Makes up to an internal torque shoulder in 5 to 6 turns and has API triangle stamp for secondary make-up verification.
- Positive makeup indication with pin nose/shoulder engagement in center of connection.
- Heavy cross-section at center of coupling provides hoop stability for enhanced leak resistance and reduced jump-out potential.
- High torque resistance.
- Drive-able.

GB 3P Thread (3 Threads per inch)

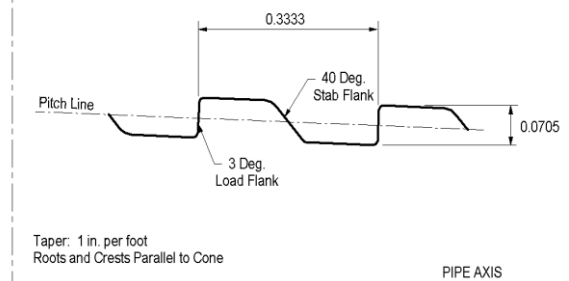

GB 3P

US Patent 5,015,017

Available

- Casing sizes 16" OD to 20" OD.
- All API Casing Grades and 16" OD through 20" OD Line Pipe; Grades X-56 and X-80.